

Engine	Cummins B5.9
Gross Power	133 kW (178.3 hp) @ 2,000 rpm
Net Power	125 kW (167.6 hp) @ 2,000 rpm
Maximum Digging Depth	11,850 mm
Standard Bucket Capacity	0.5 m ³
Operating Weight	27,000 kg

925LL

EXCAVATOR

LIUGONG



TOUGH WORLD. TOUGH EQUIPMENT.

925LL SPECIFICATIONS >>>

ENGINE

Emission Regulation	Tier 2 / Stage II
Make	Cummins
Model	B5.9
Gross Power	133 kW (178.3 hp) @ 2,000 rpm
Net Power	125 kW (167.6 hp) @ 2,000 rpm
Peak Torque	708 N • m @ 1,500 rpm
Number of Cylinders	6
Displacement	5.9 L

TRACK DRIVE

Maximum Travel Speed	5.3 km/h
Drawbar Pull	195 kN

UNDERCARRIAGE

Shoe Width	800 mm
Number of Shoes per Side	51
Number of Upper Rollers per Side	2
Number of Bottom Rollers per Side	9

HYDRAULIC SYSTEM

Main Pumps Total Flow	460 L/min
Relief Pressure, main	34.3 Mpa

SWING SYSTEM

Swing Speed	11.5 rpm
-------------	----------

REFERENCE ARM

Arm Length	8,000 mm
Arm Breakout Force, max, ISO	/

WORKING RANGES



Maximum Dig Depth	14,570 mm
Reach at Ground Level	18,233 mm
Depth of 8' Level Bottom	/
Maximum Dig Height	14,012 mm
Dump Height	12,030 mm
Maximum Dig Depth of Vertical Wall	/

BUCKET PERFORMANCE

Standard Bucket Heaped Capacity (Referenced)	0.5 m³
Minimum Heaped Capacity of Bucket Options	0.5 m³
Maximum Heaped Capacity of Bucket Options	0.5 m³
Bucket Breakout Force, max, ISO	/

SERVICE CAPACITIES

Fuel Tank	450 L
Engine Oil	25 L
Cooling System	30 L
Hydraulic Reservoir	230 L
Hydraulic System Total	330 L

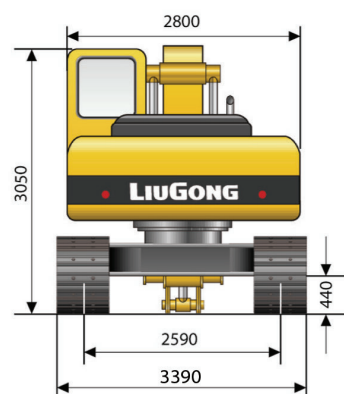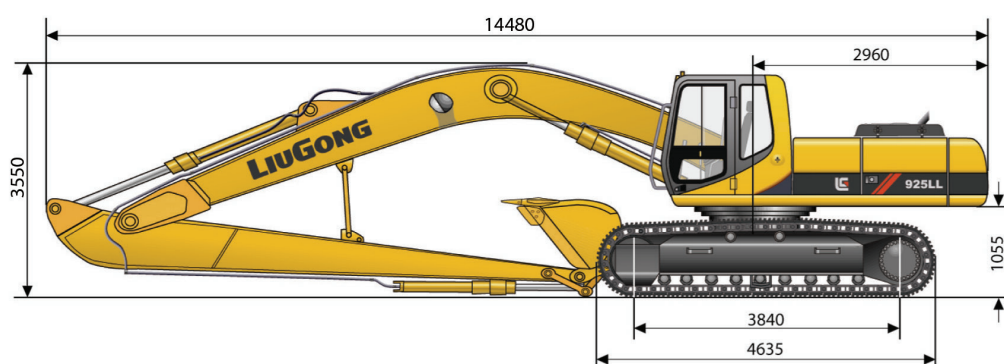

Unit: mm

Guangxi Liugong Machinery Co., Ltd.

No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China
T: +86 772 3886124 E: overseas@liugong.com
www.liugong.com

Specifications and designs are subject to change without notice. Machines shown may include optional equipment.

05/2014 Designed by Liugong